
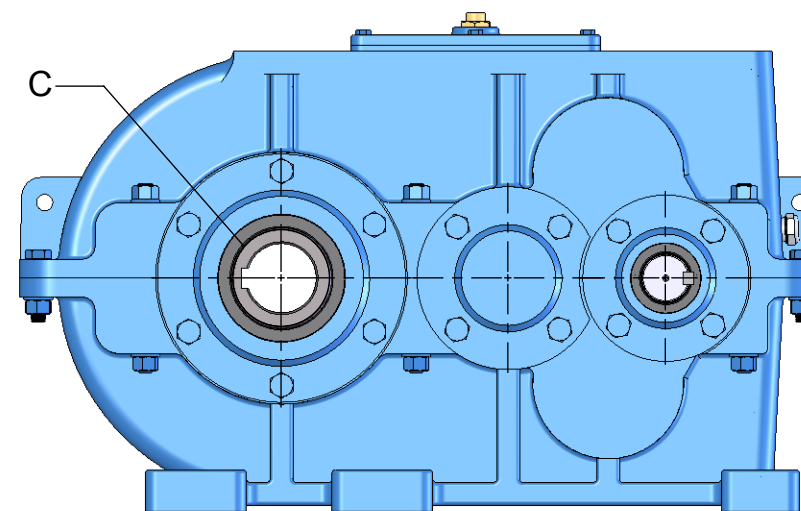
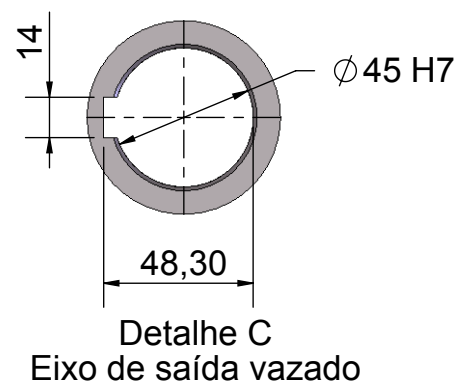
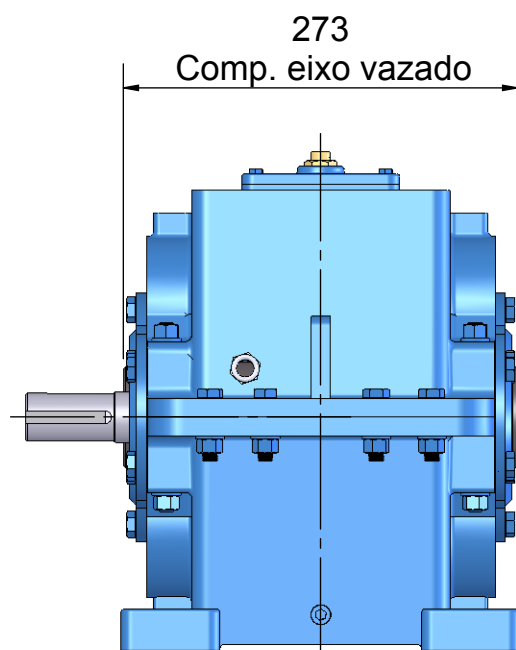
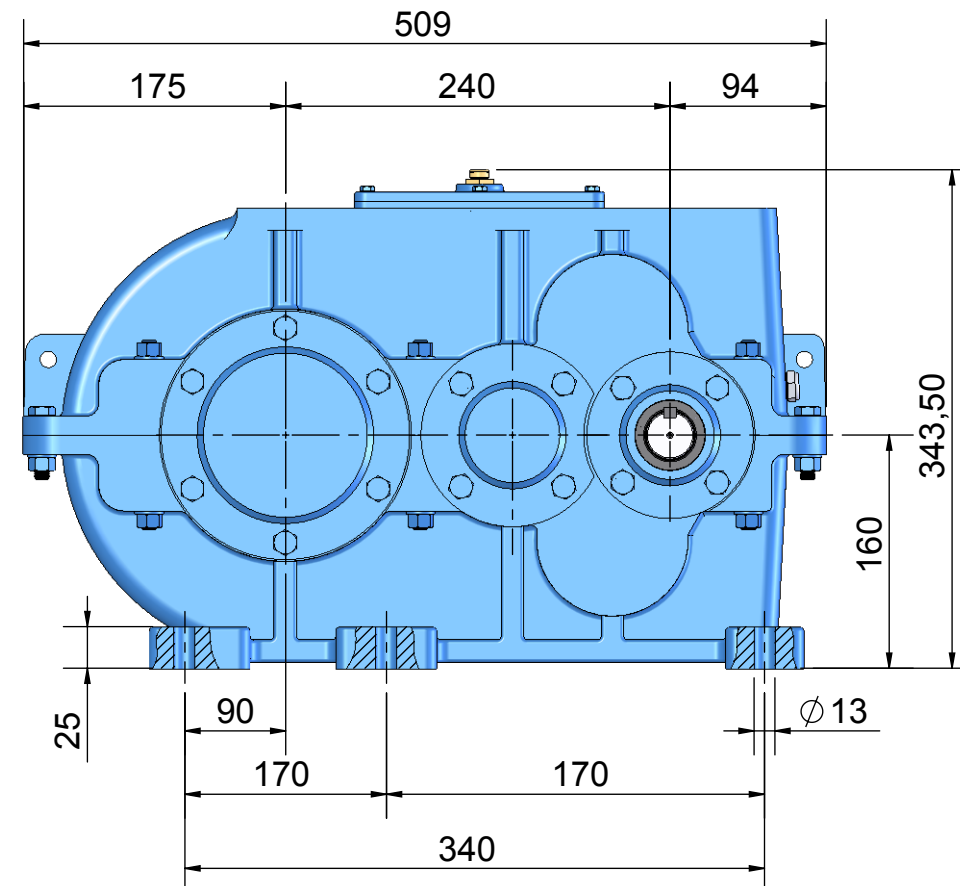
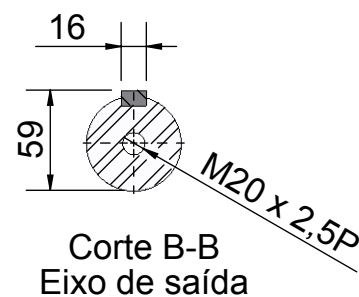
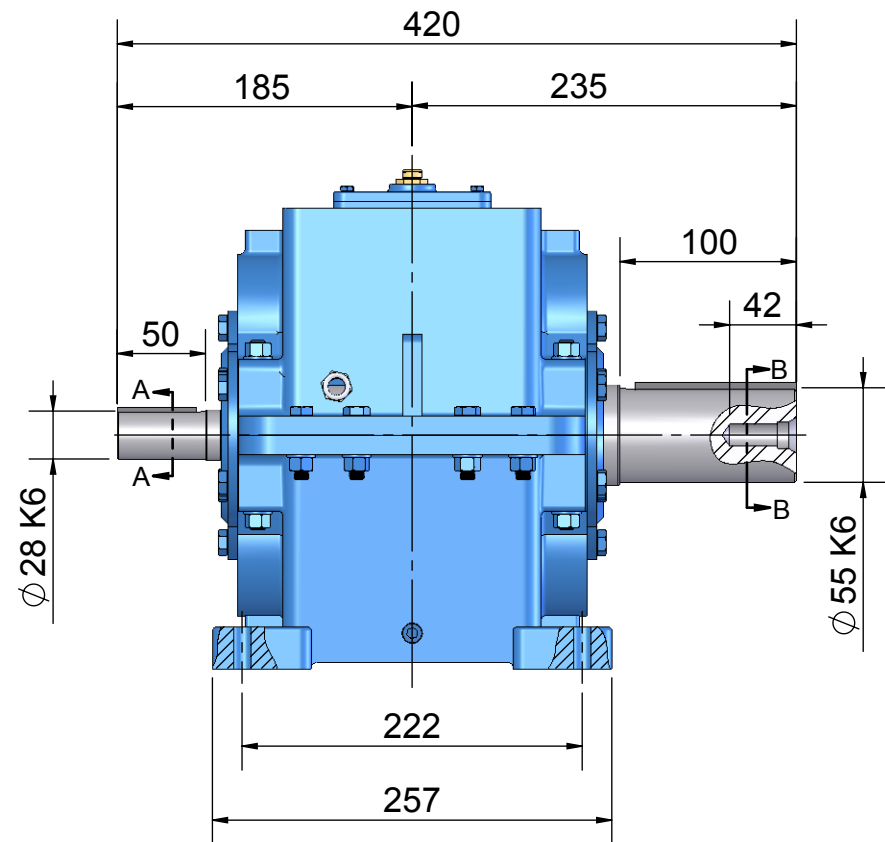




MODELO	Regime de trabalho uniforme 10h/dia, 10 arranques/h	Redução Nominal Tabelada - Padrão de linha																	
		6,3	7,1	8	9	10	11,2	12,5	14	16	18	20	22,4	25	28	31,5	35,5	40	45

CH-240D

Potência máx. admitida na entrada	CV	44,96	40,59	35,44	31,69	28,25	25,01	22,19	20,07	17,68	15,82	14,29	12,57	11,39	10,28	9,11	8,10	6,87	6,33
Momento de torção na saída	Kgf.m	109,48	109,46	109,48	109,48	109,55	109,49	109,52	109,48	109,57	109,55	109,51	109,58	109,54	109,55	109,48	109,50	109,57	109,58
Momento de torção na saída	N.m	1073,99	1073,80	1073,99	1073,99	1074,68	1074,09	1074,39	1073,99	1074,88	1074,68	1074,29	1074,97	1074,58	1074,68	1073,99	1074,19	1074,88	1074,97
Redução efetiva	i	6,33	7,01	8,30	8,98	10,08	11,38	12,83	14,18	16,11	18,00	19,92	22,66	25,00	27,70	31,24	35,14	41,46	45,00
Rotação efetiva no eixo de saída	n2	276,46	249,64	217,93	194,88	173,61	153,78	136,40	123,41	108,63	97,22	87,85	77,23	70,00	63,18	56,02	49,80	42,21	38,89

**FORMAS
CONSTRUTIVAS**

